
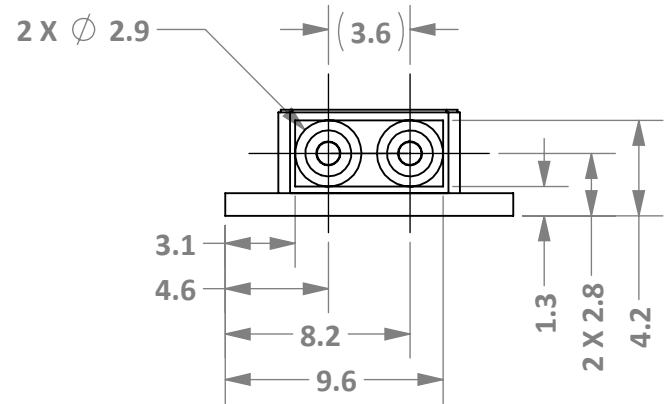
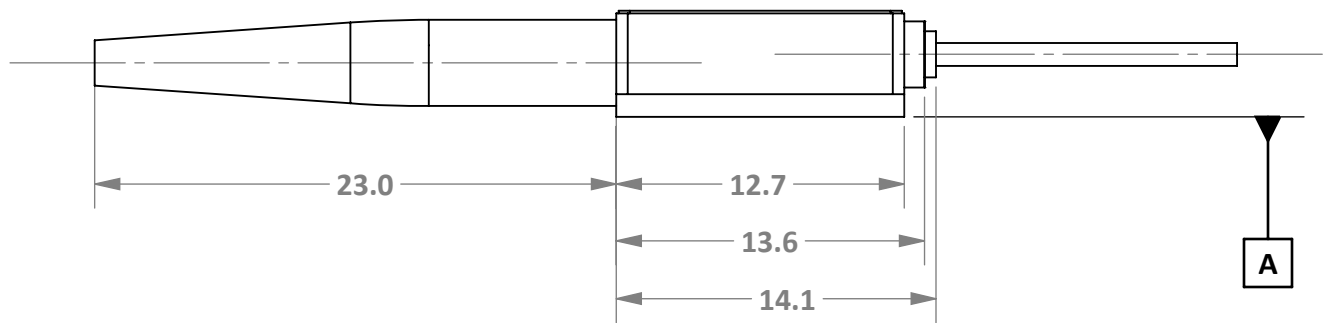
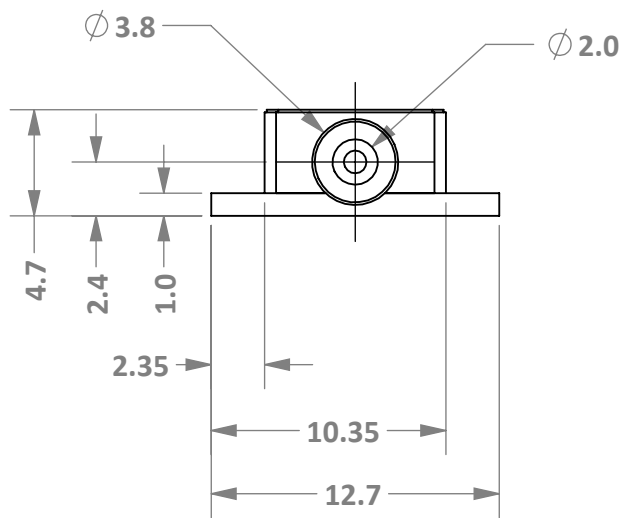
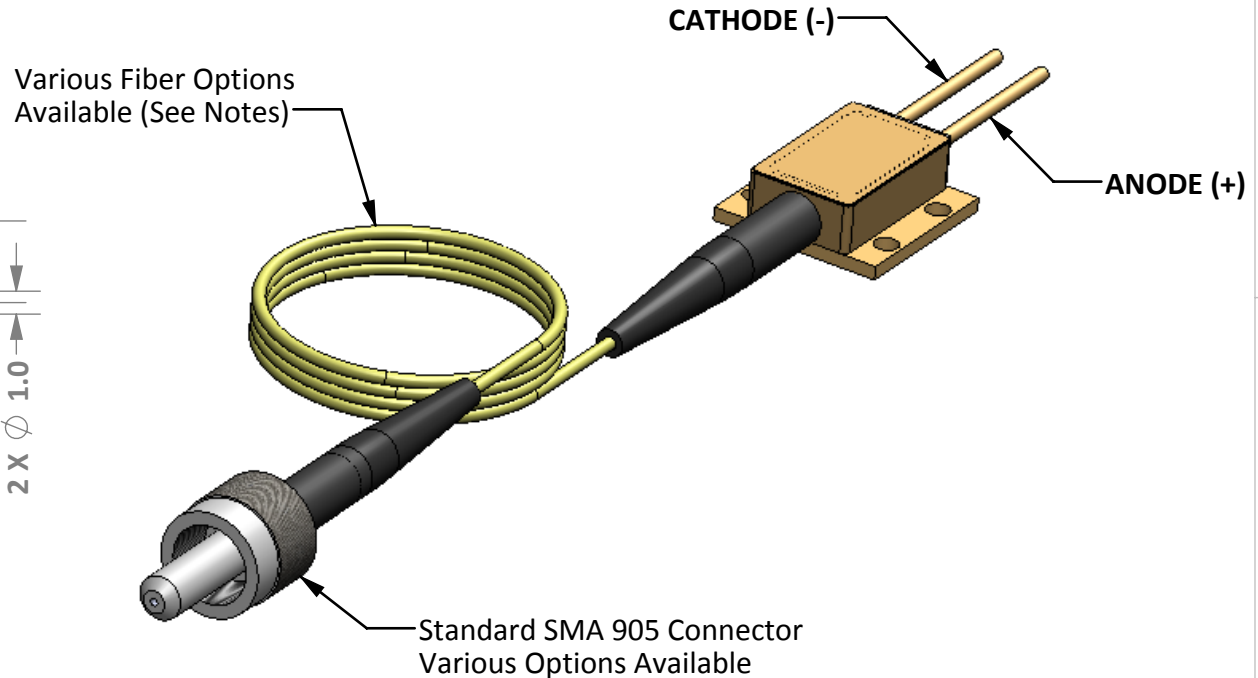


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
1	INITIAL RELEASE	6/8/2008	JF
A	ECN RELEASE	8/10/2015	GAP

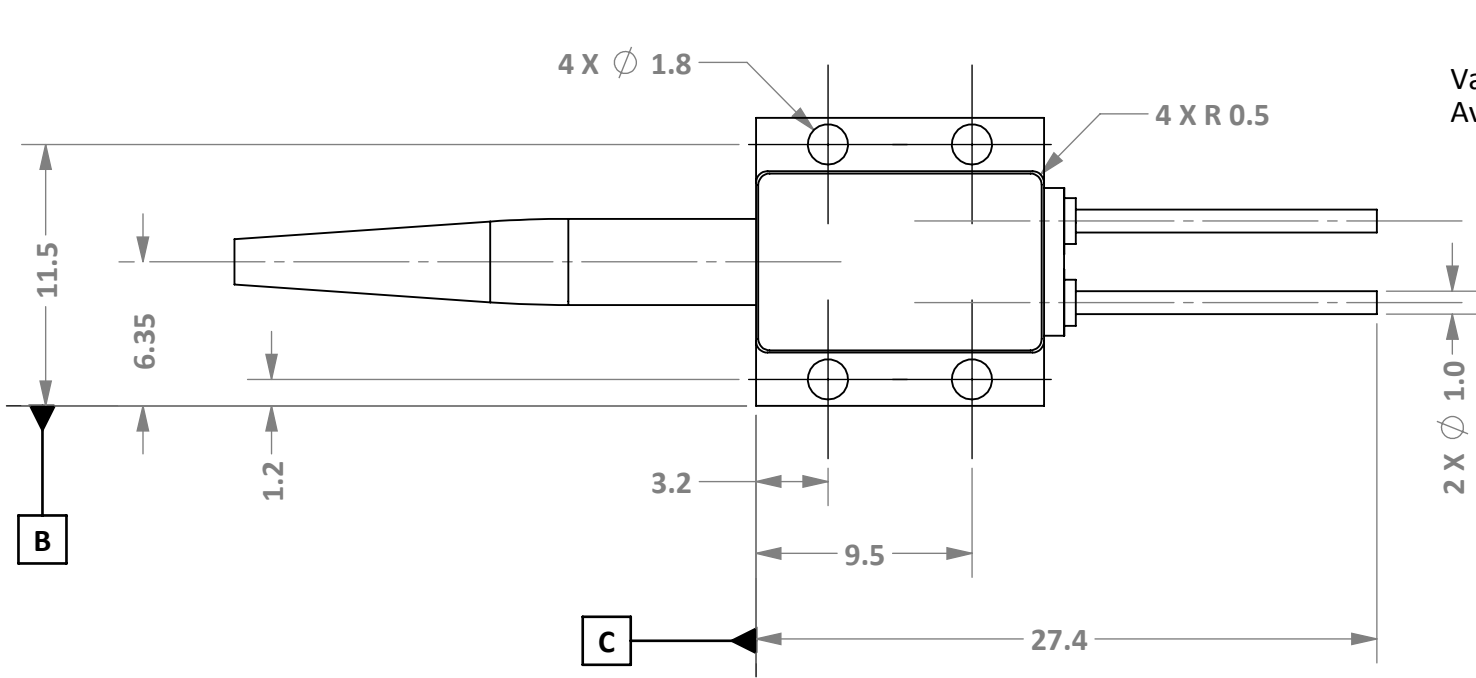

Notes:

1. Mechanical Reference only. See configurator for "SP" part numbers. Dimensions are reference only.
2. The use of a thermal pad between the package base and heat sink is required. Size the heatsink for the device's **operational limit** (see spec sheet).
3. Standard build includes 1 meter fiber. Various fiber, cable protection, and connector options are available.
4. Package is hermetically sealed.
5. Connector pins are plated gold over nickel. Solder at MAX 250° C for ≤5s is recommended.

DIMENSIONS mm [in]		PROPRIETARY AND CONFIDENTIAL		SHEAUMANN	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHEAUMANN LASER, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SHEAUMANN LASER, INC. IS PROHIBITED.		TITLE:	
ANGULAR: ± 30 MINUTES		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994		SP	
X ± .25 [.010]		THIRD ANGLE PROJECTION		SIZE	DWG. NO.
X.X ± .13 [.005]				B	RDW 840020
X.XX ± .05 [.002]				SCALE: 2:1	REV
X.XXX ± .025 [.001]					A
CONTACT SHEAUMANN LASER, INC. FOR DIMENSIONS AND FEATURES NOT SHOWN. ALL INFORMATION ON THIS DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.				SHEET 1 OF 1	
DO NOT SCALE DRAWING					